



Motors: the heart of your machine.

One thing is certain: you need to be able to rely on your motors. They convert electrical energy into mechanical energy and are therefore the central drive component in your machine. Since they play such an important part, we offer you motors with optimum drive behaviour and application-oriented options. A fast and reliable solution.

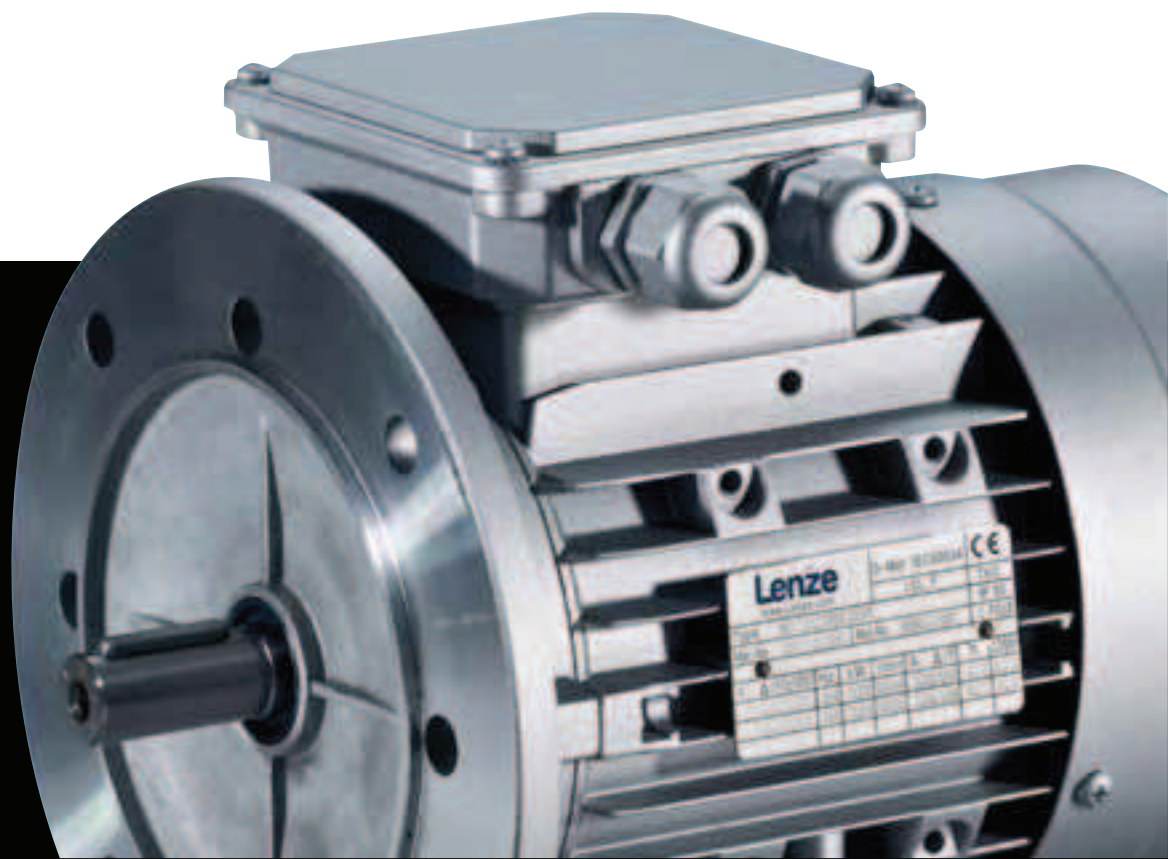





MQA asynchronous servo motors: massive power thanks to high levels of torque and impressive dynamics.



SDSGS synchronous servo motors: perfect for sensitive environments.




MDXKS synchronous servo motors: stay cool, even in high torque ranges.




Synchronous servo motors MCS: ensure top performance in even the tightest of spaces.


High-Line




Asynchronous servo motors MCA: the ideal solution for dynamic applications.



Asynchronous servo motors SDSGA: provide the necessary drive in sensitive environments.



MF three-phase AC motors: more compact and efficient drive for your systems.




MH three-phase AC motors: highly efficient motors.



MD three-phase AC motors: standard motors with modular options.





State-Line





Basic MD/MH three-phase AC motors: optimum for simple industrial applications.

Base-Line

Motors

	Basic MD/MH three-phase AC motors 	MD three-phase AC motors 	MH three-phase AC motors 	MF three-phase AC motors 
Power range	0.06 to 45 kW	0.12 to 22 kW	0.75 to 45 kW	0.55 to 22 kW
Setting range	Mains operation	1 : 17.5	1 : 17.5	1 : 24
Rated torque	0.43 to 290 Nm	0.8 to 49.2 Nm	5.08 to 290 Nm	1.53 to 59.2 Nm
Axis height	56, 63, 71, 80, 90, 100, 112, 132, 160, 180, 200, 225	56, 63, 71, 80, 90, 100, 112, 132, 160, 180	80, 90, 100, 112, 132, 160, 180, 200, 225	63, 71, 80, 90, 100, 112, 132
Number of different frame sizes available	12	10	9	7
Degree of protection	IP54/IP55	IP54/IP55	IP54/IP55	IP54/IP55
Mass inertia	Medium	Medium	Medium	Medium
Overload capacity	Medium	Medium	Medium	Medium
Power density	Medium	Medium	Medium	High
Cooling				
Forced ventilated		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Naturally ventilated				
Integrated cooling	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Feedback				
Resolver		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Incremental encoder		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SinCos encoder		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Brake				
Spring applied brake		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Permanent magnetic brake				
Electronic nameplate				
Ideally suited to	Mains operation and applications that do not require typical options such as blowers or brakes.	Mains and inverter operation, for universal use in the field of machine building and systems engineering.	Mains and inverter operation, for universal use in the field of machine building and systems engineering.	Inverter operation, for systems that require large setting ranges in tight installation spaces.

● = Standard □ = Option ▲ = Version

SDSGA asynchronous servo motors	MCA asynchronous servo motors	MQA asynchronous servo motors	SDSGS synchronous servo motors	MDXKS synchronous servo motors	MCS synchronous servo motors
					
0.075 to 0.6 kW	0.8 to 53.8 kW	9.6 to 95 kW	0.14 to 0.75 kW	1.1 to 5.9 kW	0.25 to 15.8 kW
0.27 to 1.9 Nm	2 to 75 Nm	75 to 480 Nm	0.45 to 2.2 Nm	0.6 to 16.2 Nm	0.5 to 72 Nm
Ø 75, 85, 95 mm	56, 71, 80, 90, 100, 112, 132	100, 112, 132, 160	Ø 65, 75, 85, 95 mm	56, 71, 80, 90, 100	60, 90, 120, 140, 190
3	7	4	4	5	5
IP54/IP55	IP23/IP54/IP65	IP23	IP54/IP55	IP54/IP65	IP54/IP65
High	Low	Very low	Low	Very low	Very low
High	Very high	Very high	Very high	Very high	Very high
Medium	High	Very high	High	Very high	Very high
	□	●		□	□
	●		●	●	●
□	□	□	□	□	□
□	□	□		□	□
	□	□	□	□	□
□		□	□		
	□			□	□
					●
Processes that must comply with hygiene requirements.	Environments which require compact units and a high degree of intrinsic operational reliability.	Applications with high motor loads.	Processes that must comply with hygiene requirements.	Applications that require the best possible dynamic performance.	Applications that require high dynamic performance, precision and compact dimensions.